


GRAVIMETRIC FEEDER

AS60

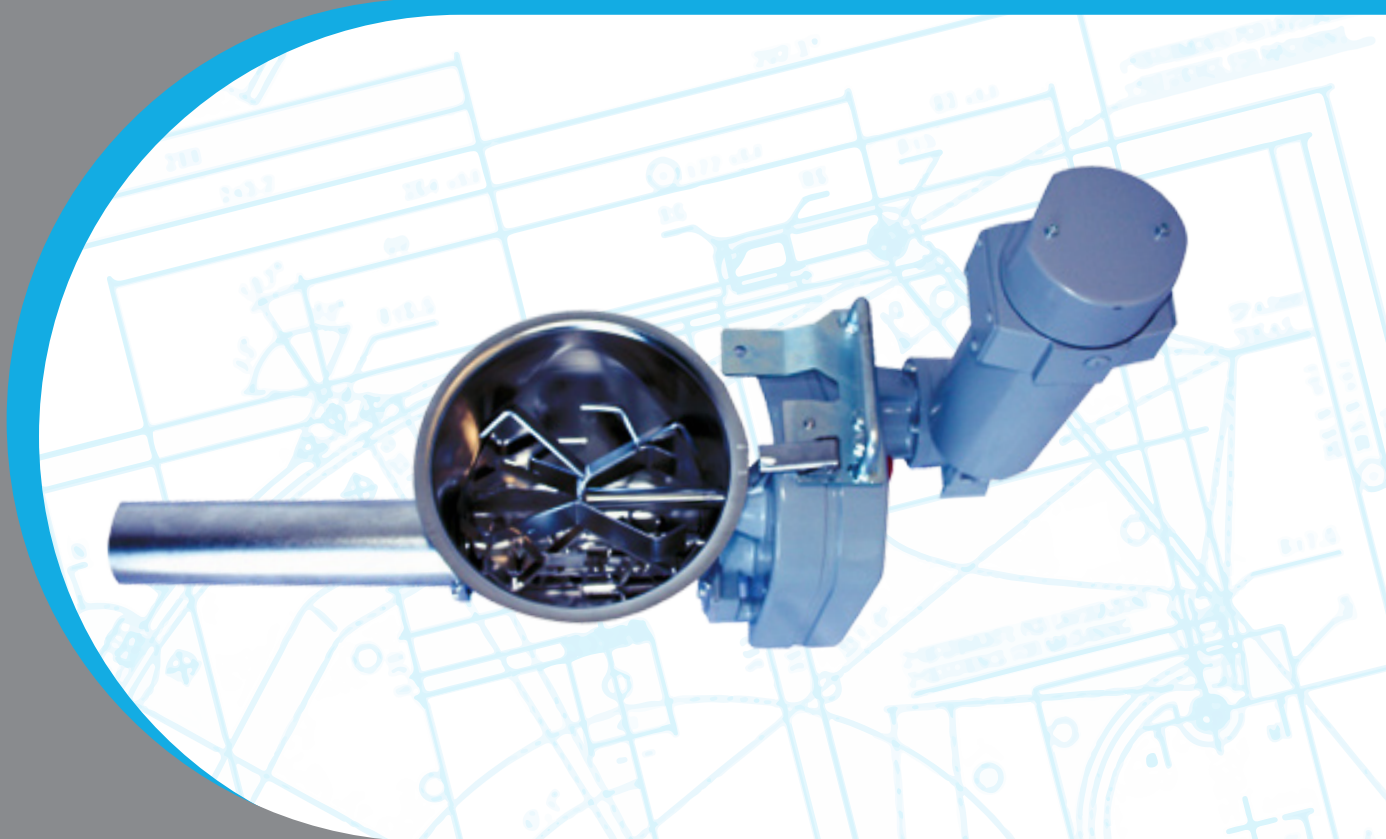

DESCRIPTION

DESIGN

CT Systems feeders have been designed to grant a wide range of flexibility for the different bulk solid materials and throughput range.

The universal single screw feeder AS60 is suitable for feeding granules, pellets, free and non free flowing powders, regrind materials, flakes and fibres.

The feeder is designed with a multiple wing agitator ensuring full agitation of the entire ingredient compartment. The multiple wing agitator eliminates bridging and inducing free material flow and an optimum screw filling level for consistent linear mass flow.


On all mechanical connections for the material inlet and outlet of the feeder it is possible to mount different accessories to reach the highest performance and precise accuracy in the desired application.

The feeder can be used in a single standalone application or it can be integrated in a multiple feeding system.

- Compact feeder and gear box design
 - High modularity for easy dismantling and cleaning
 - Horizontal material outlet discharge
 - Tool free change of the feeder screw
 - Applicable for single spiral and auger screws
 - All metal parts which are in material contact are in stainless steel 1.4404 (AISI316L)
 - Mechanical gear box with lifetime lubrication
 - 370W DC motor with speed control in protection class IP 54
 - Operating and material temperature -20..60°C (-4..130°F)
 - Gear boxes in the sizes of 7:1, 15:1, 28:1
 - Weight without accessories 33 kg
 - Color outside light grey RAL7035
- The unit conforms to **CE** directives.

DRAWING

All dimensions are in mm.
These dimensions are only guideline values.
Please ask for a technical drawing for binding measurements.

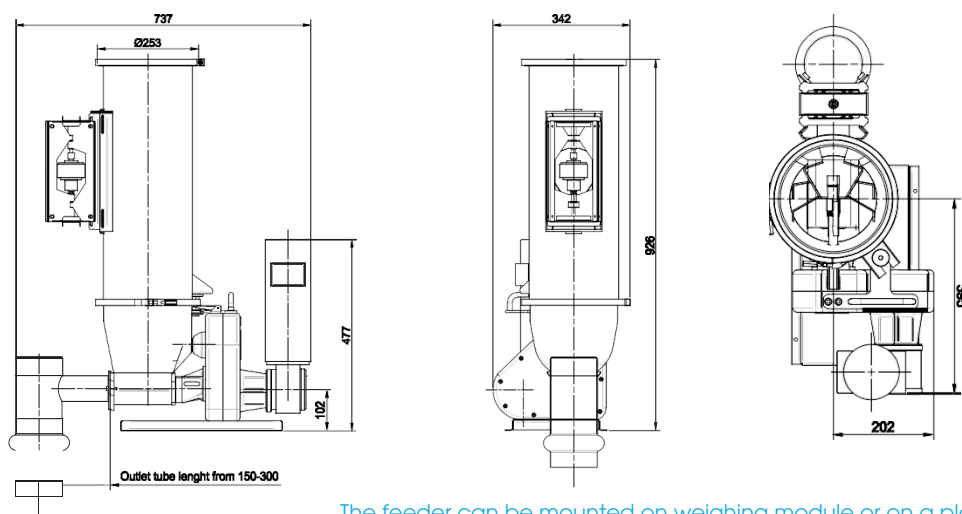

The feeder can be mounted on weighing module or on a platform scale.
It is suitable for continuous or batch processes.

OPTIONS

- Hopper extension modules in the sizes of 20l, 50l, 75l, 85l, 100l, 135l, 185l, special hoppers are on request available
- Removable vertical outlet tube with the size of 4"
- Counter bearing for very poor flowing or heavy materials
- Screw and outlet tube extensions up to the total screw length of 600 mm
- flexible outlet tube
- All sealing which are in material contact in silicon free style
- 230-460V 3PN 50-60Hz AC 370W and 750W motor with frequency inverter
- Bottom outlet for material discharge on request
- Different colors on request
- FDA certification according FDA CFR 21 #178.3570
- ATEX Zone inside 3D T140°C, 2D T140°C, 2D T140°C/2G T4, 1D T140°C/2G T4
- ATEX Zone outside 3D T140°C, 2D T140°C / 2G T4

APPLICATION

- Volumetric continuous or batch
- Gravimetric loss-in-weight continuous
- Gravimetric loss-in-weight batch
- Gravimetric gain-in-weight

The use of the different load cells and control versions are described on separate technical data sheets.

PERFORMANCE TABLE	SCREW TYPE		 SPIRAL SCREW	 AUGER SCREW
	GEAR	SPEED/MIN ⁻¹	I/h	I/h
	28:1	8 - 146	3 - 720	1 - 720
	15:1	14 - 272	5 - 1370	3 - 1350
	7:1	30 - 585	10 - 2880	6 - 2850

The AS60 can cover a throughput range from 1 to 2880 l/h., measured on free flowing granules with a bulk density of 0.6kg/l.
The shown throughput datas are indicative values subject to individual testing



Headquarters and factory

Via Postumia, snc - 15057 Tortona (AL)
Tel.: +39 0131 866105 - Fax: +39 0131 863581
E-mail: info@ctsystems.it